

ASSEMBLY INSTRUCTIONS

Owen 30" Linear Bath Light

Item # CHD2037

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.


WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL.

IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

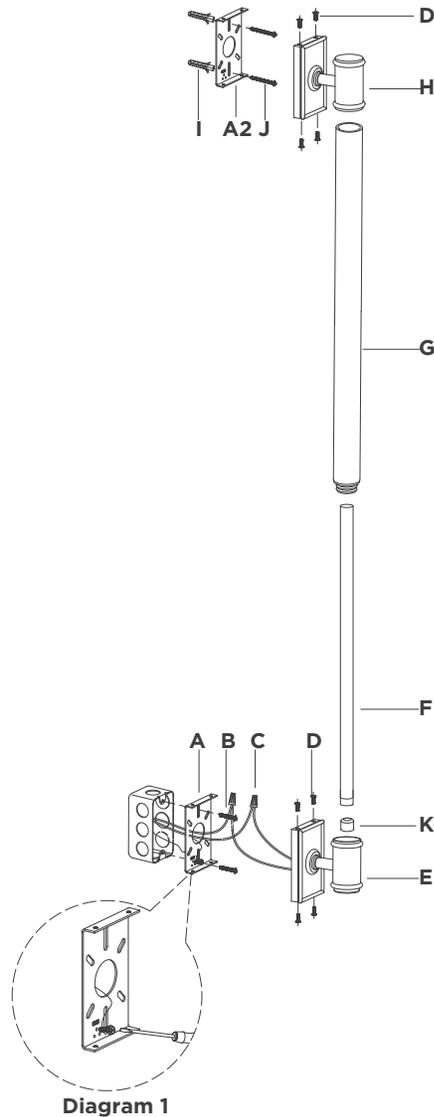

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove mounting plates **(A1 & A2)** from backplates **(E & H)** by removing screws **(D)**.
NOTE: Carefully measure distance between mounting points for mounting plates **(A1 & A2)** before moving to the next step
3. Using portable mounting plate **(A2)** as a guide, mark anchor positions.
4. Using a drill bit slightly smaller than the anchor, drill holes in the marked positions. Install anchors **(I)** into the holes using hammer.
5. Install mounting plate **(A1)** to the junction box and secure with mounting screws **(B)**.
6. Install mounting plate **(A2)** to wall by securing wood screws **(J)** to anchors **(I)**.
7. Wrap supply ground wire (usually green or bare copper) around the green grounding screw (see diagram 1). Tighten.
NOTE: It is imperative that the fixture is grounded.
8. Connect fixture neutral wire (white) to the supply neutral wire (usually white) using wire nut **(C)**.
9. Connect fixture hot wire (black) to the supply hot wire (usually black) using wire nut **(C)**.
CAUTION: Do not reverse the hot and neutral connections.
10. Make sure all wire connections are tight, then carefully tuck into the junction box.

ASSEMBLY INSTRUCTIONS

Owen 30" Linear Bath Light

Item # CHD2037

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.


WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL.

IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

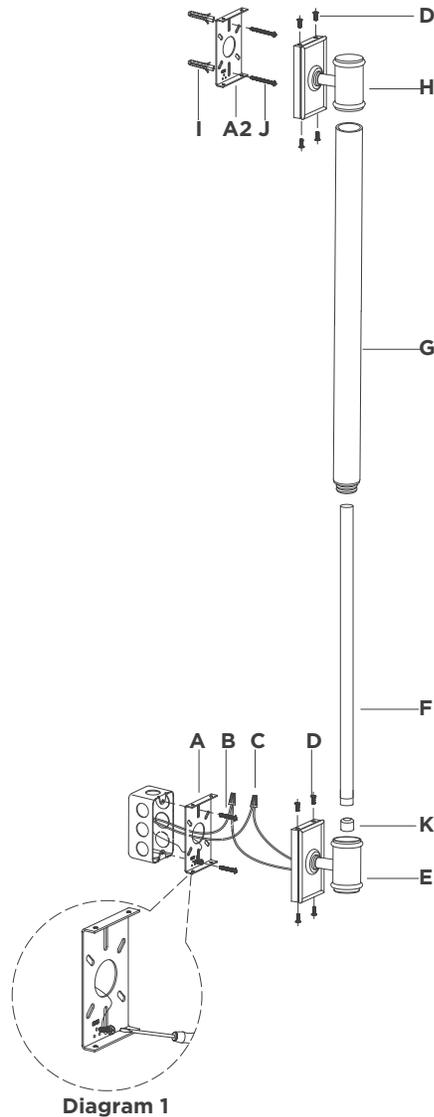

11. Remove protective caps (**K**) from fixture (**E**), then install light source (**F**) to fixture (**E**).
NOTE: All LED must be installed before testing or restoring power.
12. Thread glass shade (**G**) to fixture (**E**).
NOTE: Do not over-tighten otherwise shade could become damaged.
13. Place backplate (**H**) onto top of glass shade (**G**).
14. Install backplate (**E & H**) to mounting plate (**A1 & A2**) and secure with screws (**D**).
15. Installation is complete.

* * * Clean with a dry, soft cloth only. Do not use harsh abrasives or chemical agents.